


### High Speed Fully Automatic Two-lines Two Servo Driven Hot-cut T-Shirt Bag Making Machine

Shapes of product :

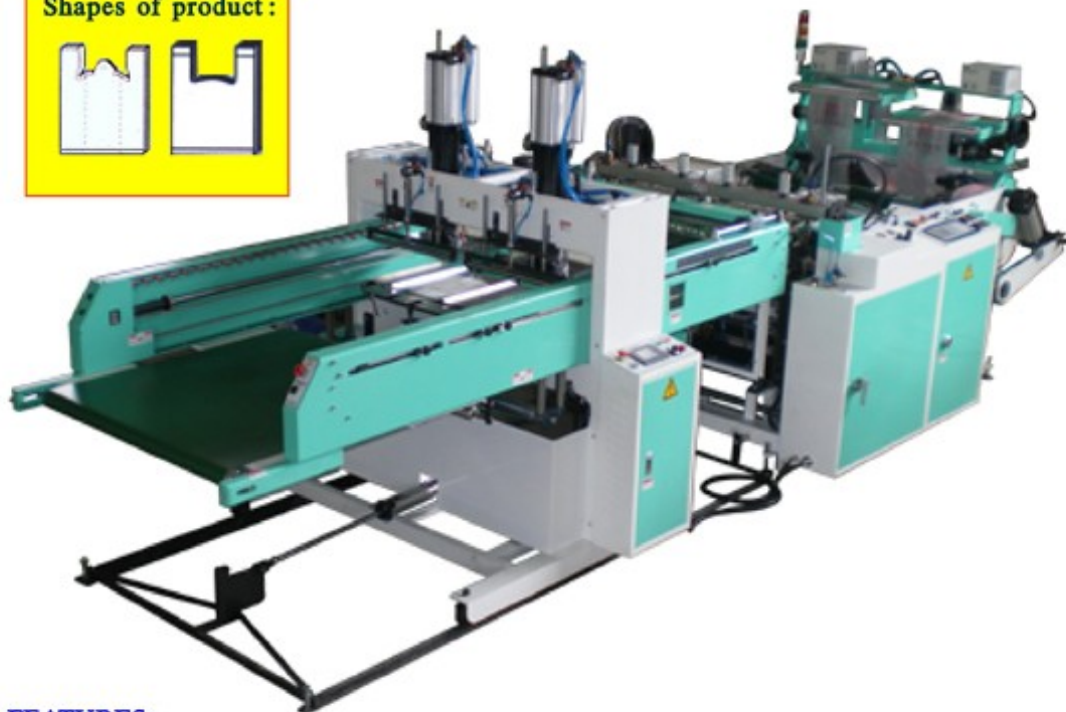

#### FEATURES :

- ※ High speed operation. Capacity : 400 pcs/min. by 2 lines;
- ※ This machine has 2 mark sensor, can produce 2 lines separately printed T-shirt bag.
- ※ Sealing bar can be easily changed, for T-shirt bag and plan bag.
- ※ Hot-cut sealing with 4 temperature controllers; the sealing keep high quality.
- ※ 2 sets servo system, small length tolerance.
- ※ Feed auto speed control by inverter, need no adjustment
- ※ Jam or no film auto stop; no film pre-connect device make film change faster
- ※ Dual lines Ultrasonic EPC. (optional) device make finished product ordered.
- ※ Heavy duty lifting unwind(optional) easy to put film roll. unwind auto tension control is standard.

#### 高速全自動熱切背心袋製袋機

##### 機械特性：

- ※ 高速率 2 線獨立製袋，產能最高每分鐘 400 個袋子(在2線時)。
- ※ 本機有2個印刷電眼，可2線獨立製造有印刷的背心袋。
- ※ 熱切式封刀加上4個溫度控制使在高速運轉中可保封口品質穩定牢固。
- ※ 採用2套高度精準的伺服馬達系統，使封切袋尺寸誤差 0.5mm 以內。
- ※ 入料採變頻自動調速控制，入料速度完全免調整。
- ※ 阻袋或無料自動停車;無料預接膜裝置，使換膜更快速。
- ※ 雙線超音波EPC(選擇性配備)裝置使成品更整齊。
- ※ 省力型置料架(選擇性配備)使上料更輕鬆;放料自動張力控制為標準配備。

Dual lines Ultrasonic EPC. device (optional)




No film pre-connect device



Fold device of punch machine



Heavy duty lifting unwind(optional)

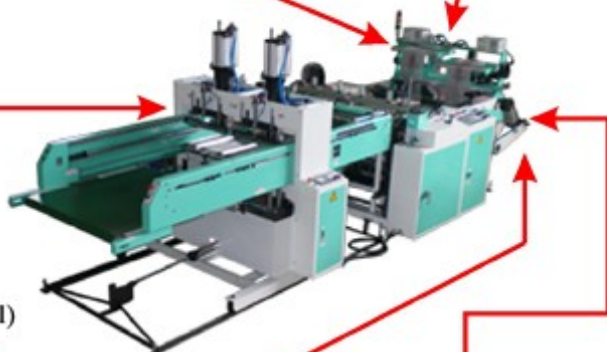

Unwind auto tension control



## SPECIFICATION :

| Model<br>型式 | Bag Size(max)<br>line x W x L<br>有效袋切 (mm)  | Max-Cutting<br>of Punch<br>有效冲切 (mm) | Thickness<br>of film<br>薄膜厚度 (mm) | Capacity<br>產能<br>(pieces/min)        | Main Motor/<br>Servo Motor<br>主馬達/伺服 | Heater<br>電熱                  | Power<br>Required<br>全台機電容量 | Air supply<br>Required<br>空壓需求 | Machine Size<br>機器尺寸<br>L x W x H (M) | Packing Size<br>包裝尺寸<br>L x W x H (M)                                     | N.W./G.W.<br>淨重/毛重<br>(Kgs) |
|-------------|---|--------------------------------------|-----------------------------------|---------------------------------------|--------------------------------------|-------------------------------|-----------------------------|--------------------------------|---------------------------------------|---|-----------------------------|
| STP-800-2   | 2 Lines<br>Max. width 355<br>Length 300~700 | Thickness<br>of pile<br>Max. 20 mm   | 0.012~0.035<br>mm                 | Max. 300(1 line)<br>Max. 400(2 lines) | 2HP 4P/<br>3.0 KW x 2                | 1.5 KW x 2<br>+<br>0.8 KW x 2 | 8.5 KW                      | 0.6 Mpa<br>400ml / minute      | 6.5 x 1.7 x 1.95                      | Sealing machine<br>2.35 x 1.85 x 2.0<br>Punch machine<br>2.9 x 1.65 x 2.1 | 2500 / 2900                 |
| STP-1000-2  | 2 Lines<br>Max. width 455<br>Length 300~700 | Thickness<br>of pile<br>Max. 20 mm   | 0.012~0.035<br>mm                 | Max. 300(1 line)<br>Max. 400(2 lines) | 2HP 4P/<br>3.0 KW x 2                | 1.9 KW x 2<br>+<br>1.0 KW x 2 | 9.7 KW                      | 0.6 Mpa<br>400ml / minute      | 6.5 x 1.9 x 1.95                      | Sealing machine<br>2.35 x 2.05 x 2.0<br>Punch machine<br>2.9 x 1.85 x 2.1 | 2700 / 3300                 |
| STP-1200-2  | 2 Lines<br>Max. width 550<br>Length 300~700 | Thickness<br>of pile<br>Max. 20 mm   | 0.012~0.035<br>mm                 | Max. 300(1 line)<br>Max. 400(2 lines) | 2HP 4P/<br>4.4 KW x 2                | 2.3 KW x 2<br>+<br>1.2 KW x 2 | 12.5 KW                     | 0.6 Mpa<br>400ml / minute      | 6.5 x 2.1 x 1.95                      | Sealing machine<br>2.35 x 2.25 x 2.0<br>Punch machine<br>2.9 x 2.05 x 2.1 | 3000 / 3500                 |



**Acerpack Plastic Machine Co ; Ltd .**

Website: <http://www.acerpack.com>

<http://shengfon.trade-taiwan.org>

E-mail: [service@acerpack.com](mailto:service@acerpack.com)

E-mail : [shengfon@ms41.hinet.net](mailto:shengfon@ms41.hinet.net)