


Auto-Change Multi-Line Bag on Roll Making Machine with Paper Core and Slit Sealing Device

Servo Shuttle system (in-line extruder possibility)

Shapes of product :

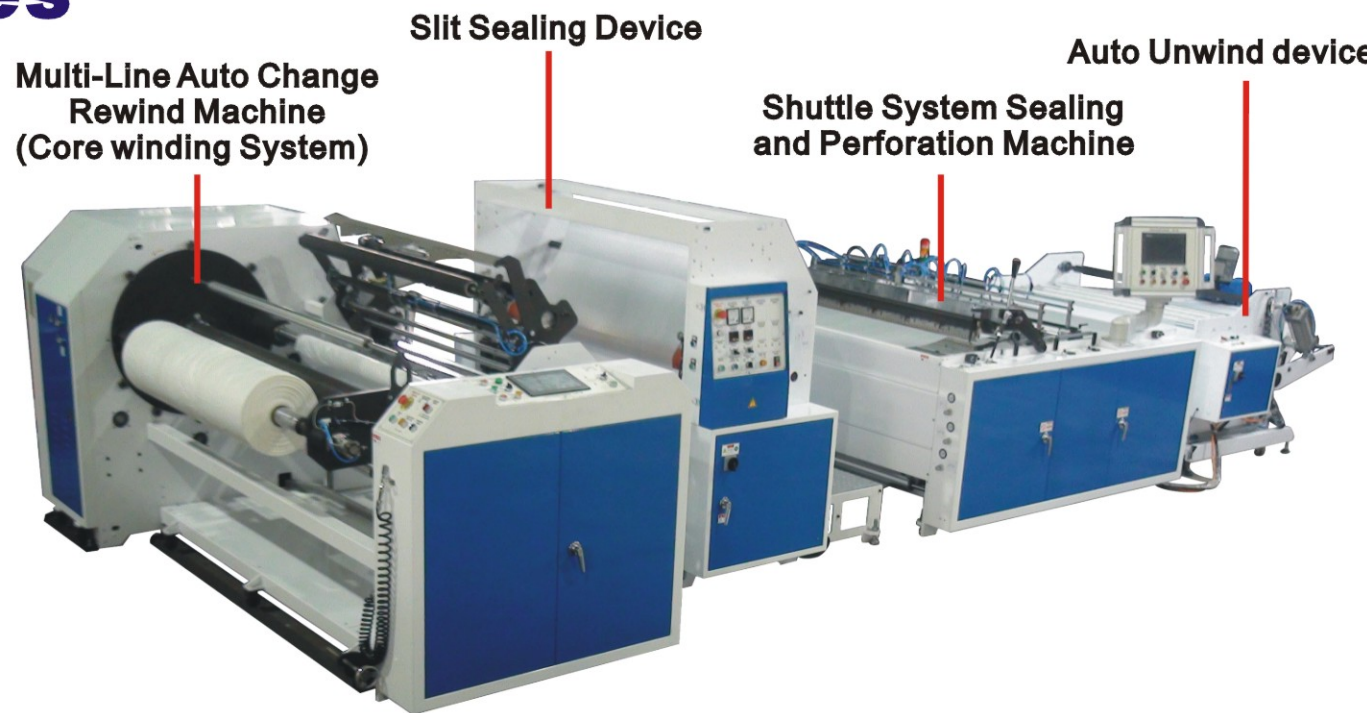

SPECIFICATION :

	Model 型號	Bag Width(mm) line x W x Dia. 袋寬x捲徑 分條後最小袋寬	Bag Length/ Film thickness 袋長/膜厚 (mm)	Capacity 產能 (Meter /min)	Servo power/ Servo quantity 伺服馬力/數量	Heater 電熱	Power Required 全台備電容量	Air supply Required 空壓需求	Machine Size 機器尺寸 LxWxH (M)	Packing Size 裝箱尺寸 LxWxH (M)	N.W./G.W. 淨重/毛重 (Kge)
OFF-LINE TYPE	STR-750S -A21E-S2	1~3 x 720~240 Roll max.220 Min. width 150	220~1200/ 0.008~0.12	Max. 100M/ line/minute	11KW/ 6 Servo	M3.5 kw +S1.6kw	15KW	0.6 Mpa 400ml / min	7.8 x 2.61 x 1.7	R-1.6x2.7x1.7 S-1.5x1.6x1.9 M-2.0x1.8x1.5 U-1.7x1.4x1.5	5000 / 6000
	STR-1000S -A21E-S3	1~4 x 960~240 Roll max.220 Min. width 150	220~1200/ 0.008~0.12	Max. 100M/ line/minute	12.5KW/ 6 Servo	M4.0 kw +S2.4kw	17KW	0.6 Mpa 400ml / min	7.8 x 2.86 x 1.7	R-1.6x2.9x1.7 S-1.5x1.8x1.9 M-2.0x2.0x1.5 U-1.7x1.6x1.5	5600 / 6800
	STR-1250S -A21E-S4	1~5 x 1200~240 Roll max.220 Min. width 150	220~1400/ 0.008~0.12	Max. 100M/ line/minute	12.5KW/ 6 Servo	M4.5 kw +S3.2kw	20KW	0.6 Mpa 400ml / min	7.8 x 3.06 x 1.7	R-1.6x3.1x1.7 S-1.5x2.0x1.9 M-2.0x2.2x1.5 U-1.7x1.8x1.5	6500 / 7900
	STR-1500S -A21E-S5	1~6 x 1440~240 Roll max.220 Min. width 150	220~1400/ 0.008~0.12	Max. 90M/ line/minute	13.5KW/ 6 Servo	M5.0 kw +S4.0kw	24KW	0.6 Mpa 400ml / min	7.8 x 3.31 x 1.7	R-1.6x3.4x1.7 S-1.5x2.4x1.9 M-2.0x2.6x1.5 U-1.7x2.2x1.5	7200 / 8800
	STR-1750S -A21E-S6	1~7 x 1680~240 Roll max.220 Min. width 150	220~1400/ 0.008~0.12	Max. 80M/ line/minute	13.5KW/ 6 Servo	M5.5 kw +S4.8kw	25KW	0.6 Mpa 400ml / min	7.8 x 3.56 x 1.7	R-1.6x3.7x1.7 S-1.5x2.7x1.9 M-2.0x2.9x1.5 U-1.7x2.5x1.5	8400 / 10300
IN-LINE TYPE	STR-750Si -A21E-S2	1~3 x 720~240 Roll max.220 Min. width 150	220~1200/ 0.008~0.12	Max. 100M/ line/minute	11KW/ 6 Servo	M3.5 kw +S1.6kw	14.5KW	0.6 Mpa 400ml / min	6.1 x 2.66 x 1.7	R-1.6x2.7x1.7 S-1.5x1.6x1.9 M-2.0x1.8x1.5	4700 / 5700
	STR-1000Si -A21E-S3	1~4 x 960~240 Roll max.220 Min. width 150	220~1200/ 0.008~0.12	Max. 100M/ line/minute	12.5KW/ 6 Servo	M4.0 kw +S2.4kw	16.5KW	0.6 Mpa 400ml / min	6.1 x 2.86 x 1.7	R-1.6x2.9x1.7 S-1.5x1.8x1.9 M-2.0x2.0x1.5	5300 / 6500
	STR-1250Si -A21E-S4	1~5 x 1200~240 Roll max.220 Min. width 150	220~1400/ 0.008~0.12	Max. 100M/ line/minute	12.5KW/ 6 Servo	M4.5 kw +S3.2kw	19.5KW	0.6 Mpa 400ml / min	6.1 x 3.06 x 1.7	R-1.6x3.1x1.7 S-1.5x2.0x1.9 M-2.0x2.2x1.5	6150 / 7500
	STR-1500Si -A21E-S5	1~6 x 1440~240 Roll max.220 Min. width 150	220~1400/ 0.008~0.12	Max. 90M/ line/minute	13.5KW/ 6 Servo	M5.0 kw +S4.0kw	23.5KW	0.6 Mpa 400ml / min	6.1 x 3.31 x 1.7	R-1.6x3.4x1.7 S-1.5x2.4x1.9 M-2.0x2.6x1.5	6750 / 8300
	STR-1750Si -A21E-S6	1~7 x 1680~240 Roll max.220 Min. width 150	220~1400/ 0.008~0.12	Max. 80M/ line/minute	13.5KW/ 6 Servo	M5.5 kw +S4.8kw	24.5KW	0.6 Mpa 400ml / min	6.1 x 3.56 x 1.7	R-1.6x3.7x1.7 S-1.5x2.7x1.9 M-2.0x2.9x1.5	7900 / 9700

MACHINE FEATURE:

01. Multi-line products roll by from One jumbo material roll and slit sealing device.
02. Products roll diameter can up to Max. 450mm(Standard diameter is Max. 220mm)
03. Easy change the bag length and tension by touch screen digital setting.
04. Shuttle type Sealing and Perforation designed make fast speed and smoothly work, Tensionless sealing; Low noise running and easy change perforation knife designed.
05. Every knife can change the tooth knife pitch for user require.
06. Printing mark function possibility.(optional)
07. Heavy duty lifting auto-unwind with Edge Position Control of OFF-LINE type.
08. Automatic speed follow by in-feed dancing device of IN-LINE type.
09. Easy to operate and maintain full-featured surveillance system by HMI.
10. Easy change designed for different core size of automatic rewind machine.
11. Micro tension system for thin film(min. 8 micrometer) and very easy to tear.
12. Heavy duty film make possibly. The total thickness for bottom sealing up to 240micro.

ps.: For packing size--R=Rewind machine; S=Slit sealing device;
M= Main sealing and perforation machine; U=Unwind device.