


Auto-Change Multi-Line Bag on Roll Making Machine with Paper Core and Slit Sealing Device

Servo Co-speed Fly Cut system (in-line extruder possibility)

Shapes of product:

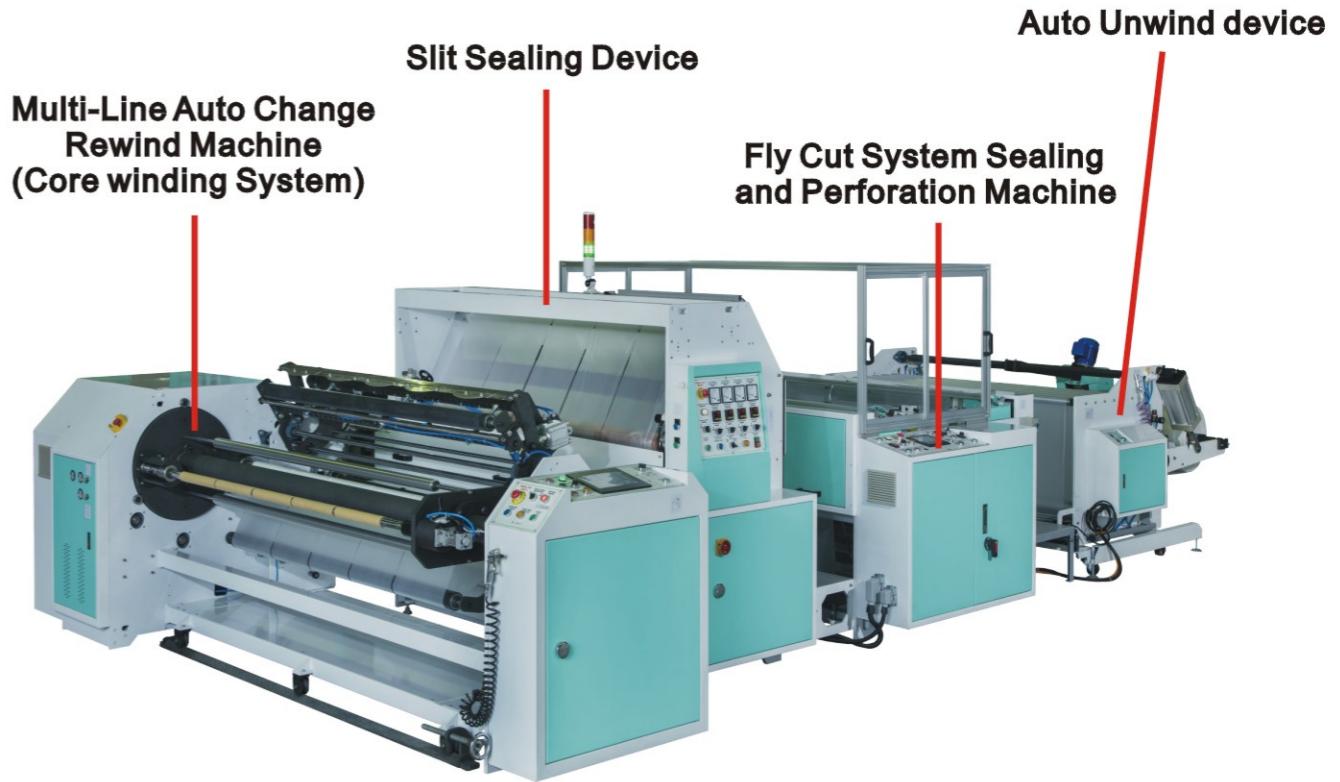

MACHINE FEATURE:

01. Multi-line products roll by from One jumbo material roll and slit sealing device.
02. Products roll diameter can up to Max. 450mm(Standard diameter is Max. 220mm)
03. Easy change the bag length and tension by touch screen digital setting.
04. Rotary Sealing and Perforation designed make fast speed and smoothly work, Tensionless sealing; Low noise running and Long life perforation knife designed.
05. Every knife can use much more than 2000000 times, maximum up to 3000000 times.
06. Printing mark function possibility and Customized Perforated pitch.(optional)
07. Heavy duty lifting auto-unwind with Edge Position Control of OFF-LINE type.
08. Automatic speed follow by in-feed dancing device of IN-LINE type.
09. Easy to operate and maintain full-featured surveillance system by HMI.
10. Easy change designed for different core size of automatic rewind machine.
11. Micro tension system for thin film(min. 6 micrometer) and very easy to tear.

SPECIFICATION :

	Model 型號	Bag Width(mm) line x W x Dia. 線寬x寬x卷徑 分條後最小袋寬	Bag Length/ Film thickness 袋長/膜厚 (mm)	Capacity 產能 (Meter /min)	Servo power / Servo quantity 伺服馬力數量	Heater 電熱	Power Required 全台備電容量	Air supply Required 空壓需求	Machine Size 機器尺寸 LxWxH(M)	Packing Size 裝箱尺寸 LxWxH(M)	N.W./G.W. 淨重/毛重 (Kgs)
OFF-LINE	STR-800V4 -A21E-S2	1~3 x 750~250 Roll max.220 Min. width 150	220~1200/ 0.006~0.025	Max. 100M/ line/ minute	15KW/ 6 Servo	M3.5 kw +S3.2kw	19KW	0.6 Mpa 400ml / min	7.8x2.66x1.7	R-1.8x2.7x1.7 S-1.5x1.8x1.9 M-2.0x1.8x1.5 U-1.7x1.4x1.5	5000 / 6000
	STR-1000V4 -A21E-S3	1~4 x 940~235 Roll max.220 Min. width 150	220~1200/ 0.006~0.025	Max. 100M/ line/ minute	16KW/ 6 Servo	M4.0 kw +S3.2kw	21KW	0.6 Mpa 400ml / min	7.8x2.86x1.7	R-1.8x2.9x1.7 S-1.5x1.8x1.9 M-2.0x2.0x1.5 U-1.7x1.8x1.5	5600 / 6800
	STR-1200V4 -A21E-S4	1~5 x1150~230 Roll max.220 Min. width 150	220~1400/ 0.006~0.025	Max. 100M/ line/ minute	17KW/ 6 Servo	M4.5 kw +S3.2kw	23KW	0.6 Mpa 400ml / min	7.8x3.06x1.7	R-1.8x3.1x1.7 S-1.5x2.0x1.9 M-2.0x2.2x1.5 U-1.7x1.8x1.5	6500 / 7900
IN-LINE	STR-800V4i -A21E-S2	1~3 x 750~250 Roll max.220 Min. width 150	220~1200/ 0.006~0.025	Max. 100M/ line/ minute	15KW/ 6 Servo	M3.5 kw +S3.2kw	18.5KW	0.6 Mpa 400ml / min	6.1x2.66x1.7	R-1.8x2.7x1.7 S-1.5x1.8x1.9 M-2.0x1.8x1.5	4700 / 5700
	STR-1000V4i -A21E-S3	1~4 x 940~235 Roll max.220 Min. width 150	220~1200/ 0.006~0.025	Max. 100M/ line/ minute	16KW/ 6 Servo	M4.0 kw +S3.2kw	20.5KW	0.6 Mpa 400ml / min	6.1x2.86x1.7	R-1.8x2.9x1.7 S-1.5x1.8x1.9 M-2.0x2.0x1.5	5300 / 6500
	STR-1200V4i -A21E-S4	1~5 x1150~230 Roll max.220 Min. width 150	220~1400/ 0.006~0.025	Max. 100M/ line/ minute	17KW/ 6 Servo	M4.5 kw +S3.2kw	22.5KW	0.6 Mpa 400ml / min	6.1x3.06x1.7	R-1.8x3.1x1.7 S-1.5x2.0x1.9 M-2.0x2.2x1.5	6150 / 7500

ps.: For packing size--R=Rewind machine; S=Slit sealing device;
M= Main sealing and perforation machine; U=Unwind device.