




STR- V4 Series

Auto-Change Core Bag on Roll Making Machine Servo Co-speed system (in-line extruder possibility)

Shapes of product :

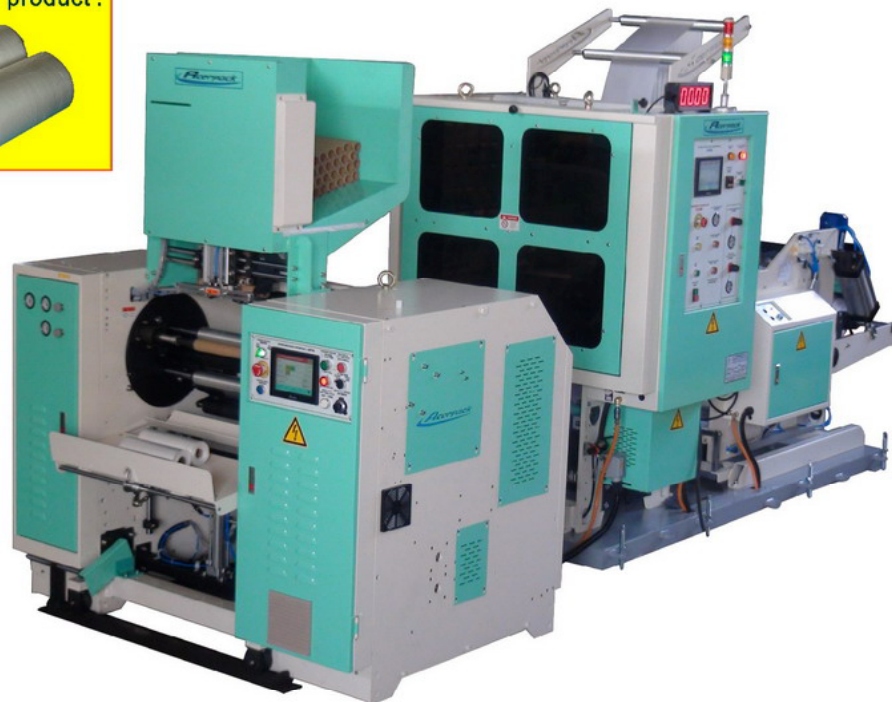

MACHINE FEATURE:

01. Easy change the bag length and tension by touch screen digital setting.
02. Rotary Sealing and Perforation designed make fast speed and smoothly work,
Tensionless sealing; Low noise running and Long life perforation knife designed.
03. Every knife can use much more than 5000000 times, maximum up to 8000000 times.
04. Printing mark function possibility and Customized Perforated pitch.(optional)
05. Heavy duty lifting auto-unwind with Edge Position Control of OFF-LINE type.
06. Automatic speed follow by in-feed dancing device of IN-LINE type.
07. Easy to operate and maintain full-featured surveillance system by HMI.
08. Easy change designed for different core size of automatic rewind machine.
09. Micro tension system for thin film(min. 5 micrometer) and very easy to tear.
10. Auto Unloading when products roll at full position and motor edge position adjust.
11. Two line rewind with hot slitting system for double products possibility.(extra type)
12. Two line rewind with two line unwind for double products possibility.(extra type)

TOUCH SCREEN



ROTARY SEALING
& PERFORATION



AUTO UNWIND + EPC
FOR OFF-LINE TYPE



AUTO UNLOAD




POWER MOTOR
POSITION MOVE



IN-LINE EXTRUDER TYPE

FEED INCOMING
SENSING FOR
SPEED FOLLOW
(IN-LINE ONLY)

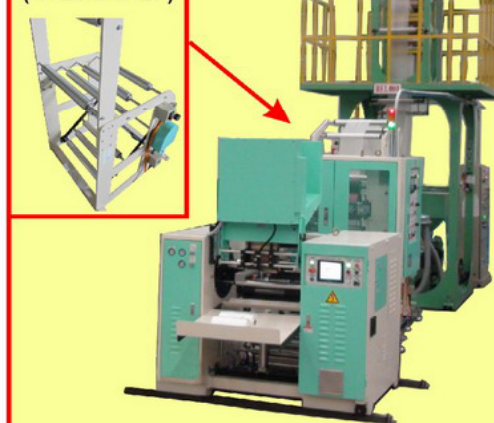

TWO LINES REWIND TYPE



HOT
SLITTING
DEVICE



2 LINES
UNWIND



SPECIFICATION :

	Model 型號	Bag Width(mm) 袋寬x卷徑	Bag Length/ Film thickness 袋長/膜厚 (mm)	Capacity 產能 (Meter /min)	Servo power / Servo quantity 伺服馬力/數量	Heater 電熱	Power Required 全台需電容量	Air supply Required 空壓需求	Machine Size 機器尺寸 LxWxH(M)	Packing Size 裝箱尺寸 LxWxH (M)	N.W./G.W. 淨重 / 毛重 (Kgs)
OFF-LINE	STR-400V4-A21	1 x 230~375 Roll max.130	200~2000 / 0.005~0.018	Max. 120M/ line/ minute	10.75KW/ 6 Servo	2.0 KW	9.5KW	0.6 Mpa 300ml / min	4.7 x 1.6 x 2.4	Sealing machine 2.9 x 1.2 x 2.2 / Winding machine 1.5 x 1.7 x 2.2	2500 / 2900
	STR-500V4-A21	1 x 330~475 Roll max.130	200~2000 / 0.005~0.018	Max. 120M/ line/ minute	10.75KW/ 6 Servo	2.2 KW	9.7 KW	0.6 Mpa 300ml / min	4.7 x 1.7 x 2.4	Sealing machine 2.9 x 1.3 x 2.2 / Winding machine 1.5 x 1.8 x 2.2	2700 / 3200
	STR2-800V4-A22	2 x 220~350 Roll max.130	200~2000 / 0.005~0.018	Max. 110M/ line/ minute	14.5KW/ 9 Servo	3.8 KW	13.7 KW	0.6 Mpa 300ml / min	5.9 x 2.6 x 2.5	Sealing machine 3.0 x 1.7 x 2.2 / Winding machine 2.3 x 2.8 x 2.2	3900 / 4500
IN-LINE	STR-400V4i-A21	1 x 230~375 Roll max.130	200~2000 / 0.005~0.018	Max. 120M/ line/ minute	10.75KW/ 6 Servo	2.0 KW	9.5 KW	0.6 Mpa 300ml / min	4.7 x 1.6 x 2.4	Sealing machine 2.9 x 1.2 x 2.2 / Winding machine 1.5 x 1.7 x 2.2	2500 / 2900
	STR-500V4i-A21	1 x 330~475 Roll max.130	200~2000 / 0.005~0.018	Max. 120M/ line/ minute	10.75KW/ 6 Servo	2.2 KW	9.7 KW	0.6 Mpa 300ml / min	4.7 x 1.7 x 2.4	Sealing machine 2.9 x 1.3 x 2.2 / Winding machine 1.5 x 1.8 x 2.2	2700 / 3200
	STR2-800V4i-A22	2 x 220~350 Roll max.130	200~2000 / 0.005~0.018	Max. 110M/ line/ minute	14.5KW/ 9 Servo	3.8 KW	13.7 KW	0.6 Mpa 300ml / min	5.9 x 2.6 x 2.5	Sealing machine 3.0 x 1.7 x 2.2 / Winding machine 2.3 x 2.8 x 2.2	3900 / 4500



Acerpack Plastic Machine Co ; Ltd .

Website: <http://www.acerpack.com> E-mail: service@acerpack.com