




STP-VS-2 Series


High Speed Fully Automatic 2 Track Hot-cut T-Shirt Bag Making Machine with Air Tension control

Shapes of product :



Standard device with the machine

Turn-up sealing design

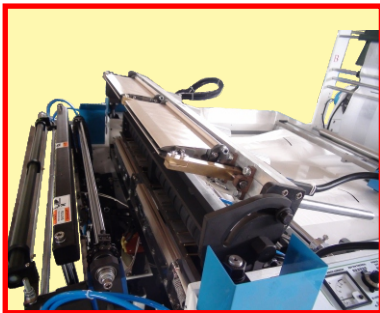

Mark photo cell device



Air tension control



FEATURES :


- ※ High speed operation. Capacity : 440 pcs/min. (2 lines)
- ※ 2 sets servo system with 2 mark sensor, can produce 2 lines printed T-shirt bag.
- ※ Turn-up Sealing bar design, easy to clean and maintain.
- ※ Hot-cut sealing with 4 temperature controllers; the sealing keep high quality.
- ※ Feed auto speed control by inverter and air tension control.
- ※ Block or no film auto stop; no film pre-connect device make film change faster.
- ※ Automatic punch machine with fold device.
- ※ All system by H.M. I. and P.L.C. control, all-function display, maintenance.
- ※ Optional--Heavy duty lifting auto unwind and Air shaft easy to put film roll.

STP-VS-2 Series


Mark photo cell device





In-feed guide device

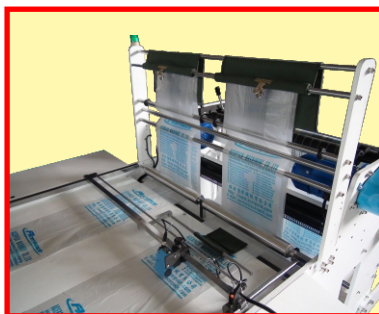

In-feed roller device

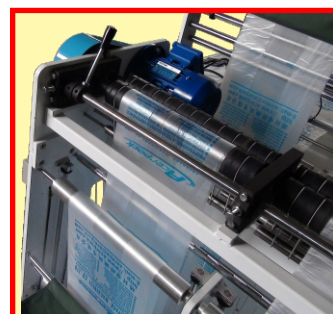

Option device--Air shaft

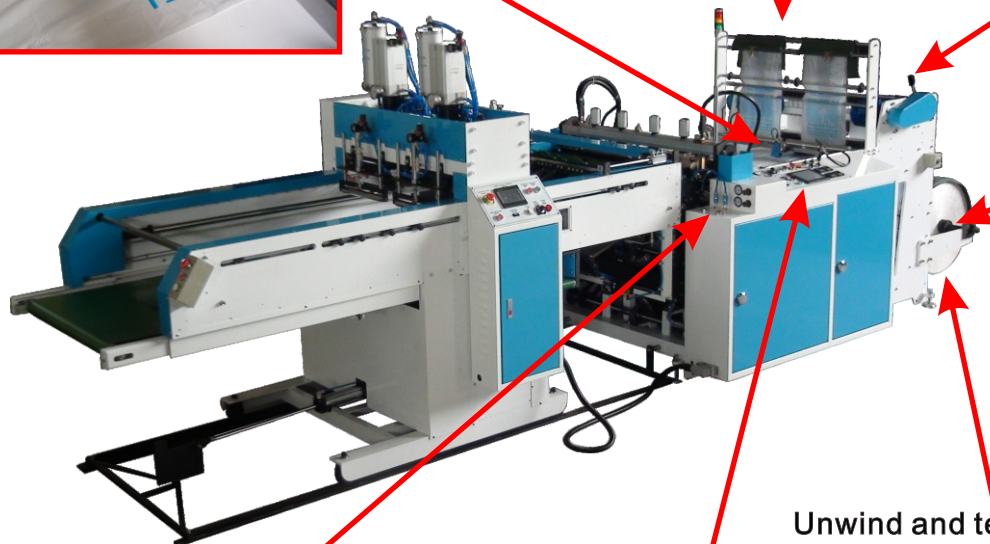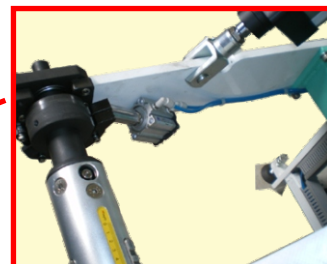

Smooth air device



Control faceplate



Unwind and tension device



SPECIFICATION :

Model 型式	Bag Width line x W (max) 線x袋寬 (mm)	Bag Length/ Film thickness 袋長/膜厚 (mm)	Max-Cutting of Punch 有效沖剪(mm)	Capacity 產能 (pieces/min)	Main Motor/ Servo Motor 主馬達/伺服	Heater 電熱	Power Required 全台備電容量	Air supply Required 空壓需求	Machine Size 機器尺寸 LxWxH (M)	Packing Size 裝箱尺寸 LxWxH (M)	N.W./G.W. 淨重/毛重 (Kgs)
STP-800V2S-2	2 x 360	300~700/ 0.012~0.035	Thickness of pile Max. 20 mm	Max. 440 (2 lines)	2Hp 4P/ 3.0 KW x 2	1.5 KW x 2 + 0.8 KW x 2	8.2 KW	0.6 Mpa 400ml / min	5.7 x 1.7 x 1.9	Sealing machine 2.35 x 1.85 x 2.0 / Punch machine 2.9 x 1.65 x 2.1	2600 / 3000
STP-1000V2S-2	2 x 460	300~700/ 0.012~0.035	Thickness of pile Max. 20 mm	Max. 420 (2 lines)	2Hp 4P/ 3.0 KW x 2	1.9 KW x 2 + 1.0 KW x 2	9.4 KW	0.6 Mpa 400ml / min	5.7 x 1.9 x 1.9	Sealing machine 2.35 x 2.05 x 2.0 / Punch machine 2.9 x 1.85 x 2.1	2900 / 3300
STP-1200V2S-2	2 x 560	300~700/ 0.012~0.035	Thickness of pile Max. 20 mm	Max. 400 (2 lines)	2Hp 4P/ 4.5 KW x 2	2.3 KW x 2 + 1.2 KW x 2	12.2 KW	0.6 Mpa 400ml / min	5.7 x 2.1 x 1.9	Sealing machine 2.35 x 2.25 x 2.0 / Punch machine 2.9 x 2.05 x 2.1	3100 / 3600
STP-800VS-2	2 x 360	300~700/ 0.012~0.035	Thickness of pile Max. 20 mm	Max. 400 (2 lines)	2Hp 4P/ 3.0 KW x 1	1.5 KW x 2 + 0.8 KW x 2	7.0 KW	0.6 Mpa 400ml / min	5.7 x 1.7 x 1.9	Sealing machine 2.35 x 1.85 x 2.0 / Punch machine 2.9 x 1.65 x 2.1	2600 / 3000
STP-1000VS-2	2 x 460	300~700/ 0.012~0.035	Thickness of pile Max. 20 mm	Max. 400 (2 lines)	2Hp 4P/ 4.5 KW x 1	1.9 KW x 2 + 1.0 KW x 2	8.9 KW	0.6 Mpa 400ml / min	5.7 x 1.9 x 1.9	Sealing machine 2.35 x 2.05 x 2.0 / Punch machine 2.9 x 1.85 x 2.1	2850 / 3250
STP-1200VS-2	2 x 560	300~700/ 0.012~0.035	Thickness of pile Max. 20 mm	Max. 400 (2 lines)	2Hp 4P/ 4.5 KW x 1	2.3 KW x 2 + 1.2 KW x 2	9.9 KW	0.6 Mpa 400ml / min	5.7 x 2.1 x 1.9	Sealing machine 2.35 x 2.25 x 2.0 / Punch machine 2.9 x 2.05 x 2.1	3050 / 3550



Acerpack Plastic Machine Co ; Ltd .

Website: <http://www.acerpack.com>

E-mail: service@acerpack.com