

## High speed Servo driven Universal Side sealing Bag Making Machine 伺服高速多功能側封袋製袋機

### Shapes of product :




### FEATURES :

- ※ The E.P.C. device combined with the unwinder, its function is sensitive and stable, easy operation.
- ※ Fully automatic unwinder, unwinding speed auto adjust, no speed adjustment necessary. (Optional)
- ※ Triangle folding device, easily and smoothly fold the single layer film to double. (Optional)
- ※ Choice of overlapping EPC and triangle folding device, to save installation space occupied.
- ※ Mixed use of multi functions, can produce many different styled bag.
- ※ Standard equipments are: double lip folding device, bottom gusset device, side opening device. (Trimming or side opening)
- ※ Special rotary sealing knife design, make the cleaning of sealing knife safe, convenience, quick and easy.
- ※ Special pneumatic gate and pressing roller device, cooperate with the main machine can carry and out-feed the blocked finished product.
- ※ Strong and light structure, and cooperate with the rolling wheel with brake, can easily change the place.
- ※ Optional equipments are: self-adhesive device, pearl insertion device, punching unit, double sealing device, block out-feed device

### 機械特性：

- ※ 與放台結合為一體的EPC邊緣追蹤裝置，性能靈敏穩定，操控簡易。
- ※ 全自動放料台，放料速度自動調控，完全無需調整速度。（選擇配備）
- ※ 三角對折裝置，輕易平順地將單張膠膜對折成雙膜。（選擇配備）
- ※ 可選擇重疊型EPC放料與三角對折裝置，以節省安裝之佔地空間。（選擇配備）
- ※ 多功能配備混合使用，可製造出式樣極多的袋子。
- ※ 標準配備有雙折疊機構，折底機構，剖邊刀機構（正剖與側剖）。
- ※ 獨特的旋轉式提刀設計，讓清潔封切刀的工作安全及方便、快速、容易。
- ※ 獨特的氣壓式閘板和壓輪裝置，配合主機可做成成品整疊輸送。
- ※ 堅固輕巧的架構，配合煞車活動輪，可輕易地轉換使用場所。
- ※ 選擇配備有：自黏膠帶裝置；吊卡條裝置；打孔裝置；雙封線裝置；整本輸出裝置等。

# SV-HC series

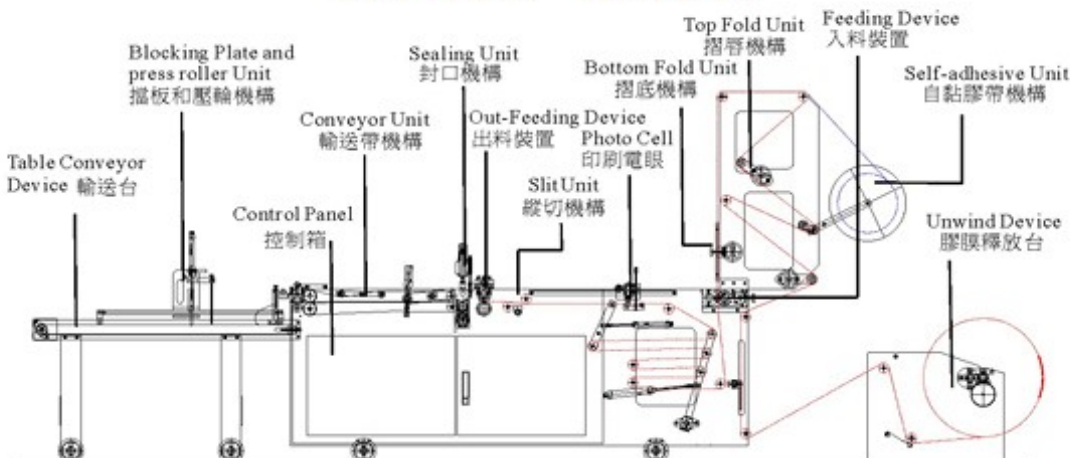

## Optional Equipment

+ **SV-800HCE-A**

Type: E-500A

Type: T-1600

+ **SV-800HCTE**


Type: E-1600A

+ **SV-800HCTE-EMT**

Type: EMT-1600



## Bags Available :

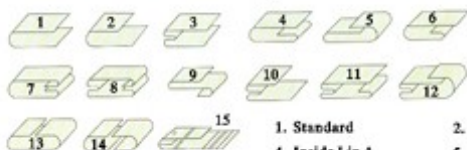

1. Standard
2. Standard Lip
3. Standard Gusset
4. Inside Lip A
5. Inside Lip B
6. Inside Lip C
7. Inside Lip D
8. Inside Lip E
9. Outside Lip
10. Gusset Lip
11. Gusset Inside Lip
12. Gusset Outside Lip
13. Single side split bag
14. Center Slit
15. Hanging bag

## SPECIFICATION

Model 型號	Making Bag Size (mm) 製袋規格				Making bag Speed (bags/min) 製袋速度	Thickness of film 膠膜厚度	Servo motor 伺服馬達	Power Required 全台備電	Machine Size 機械尺寸		
	Length 製袋長度	Width 製袋寬度	Top folding 頂部摺疊	Bottom Gusseting 底部摺疊					L. 長	W. 寬	H. 高
SV-800HC	65~760	76~770	Up to 75 mm	Up to 65 mm	30~250	0.01~ 0.20mm	2.9 KW	7.5 KW	4.6 M	1.55 M	2.0 M
SV-1000HC	85~960	76~770	Up to 75 mm	Up to 65 mm	30~250	0.01~ 0.20mm	4.4 KW	9.0 KW	4.6 M	1.75 M	2.0 M
SV-1200HC	100~1150	76~770	Up to 75 mm	Up to 65 mm	30~250	0.01~ 0.20mm	4.4 KW	9.7 KW	4.6 M	1.95 M	2.1 M
Optional Equipment 選擇性配備	1. Air Compressor : 3 HP ; 2. Double Sealing device. ; 3. Punching device ; 4. Top-fold sealing device 5. Self-adhesive Tape Feeding ; 6. Perforating device ; 7. Air Shaft ; 8. EPC with Auto unwinder ; 9. Folder 1. 空壓機-3HP ; 2. 雙封線中切裝置 ; 3. 打孔裝置 ; 4. 折唇封口裝置 ; 5. 自黏膠帶裝置 ; 6. 點斷裝置 ; 7. 氣壓輪 8. 附邊線追蹤功能自動放台 ; 9. 三角擺疊架...										



**Acerpack Plastic Machine Co ; Ltd.**

Website: <http://www.acerpack.com>

mail: [service@acerpack.com](mailto:service@acerpack.com)