


Auto-Change Bottom sealing Perforation Garbage Bag with Dual Fold Coreless on Roll Making Machine (Servo Co-speed system) In-line auto package possibility

Shapes of product :

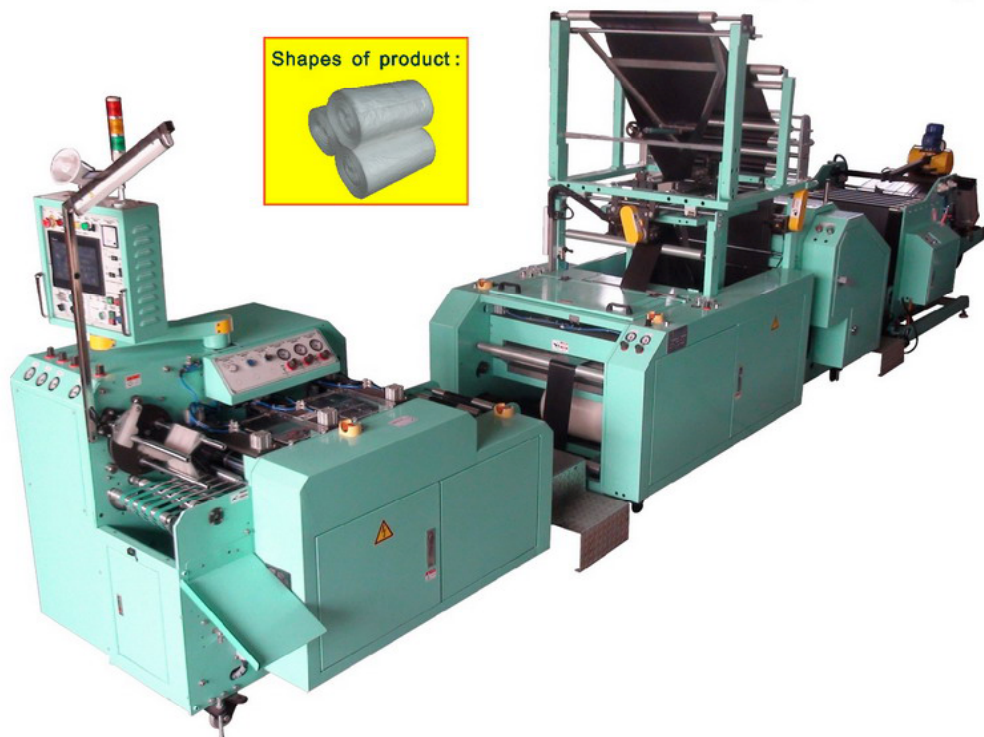

MACHINE FEATURE:

01. Easy change the bag length and tension by touch screen digital setting.
02. Rotary Sealing and Perforation designed make fast speed and smoothly work, Tensionless sealing; Low noise running and Long life perforation knife designed.
03. Every knife can use much more than 5000000 times, maximum up to 80000000 times.
04. Dual fold device for "V" shape; "C" shape and "2V" shape folding.
05. Easy change the fold shaft by 3 ways adjustment designed with power motor move.
06. Printing mark function possibility and Customized Perforated pitch.(optional)
07. Heavy duty lifting auto-unwind with Edge Position Control.
08. Multi servo co-speed system, digital tension setting for fold and perforation.
09. Products roll by single shaft winding, the roll does not convex umbilical.
10. Automatic speed follow system, run machine just by one touch.
11. Easy to operate and maintain full-featured surveillance system by HMI.
12. In-line Robot working station or automatic package function possibility.(optional)

TOUCH SCREEN



AUTO CHANGE
REWIND SHAFT



AUTO UNWIND + EPC



ROTARY
PERFORATION



ROTARY SEALING




DUAL FOLD DEVICE



ROBOT ARM DEVICE
(OPTIONAL)



AUTO PACKAGE MACHINE
(OPTIONAL)

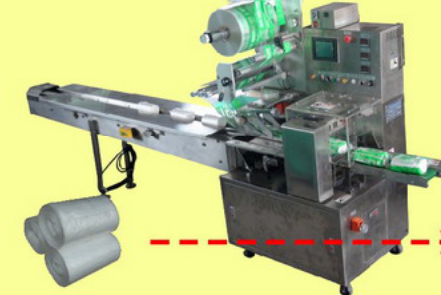

Finish product :



SPECIFICATION :

Model 型號	Bag Width(mm) line x W x Dia. 袋寬x寬x徑	Bag Length/ Film thickness 袋長/膜厚 (mm)	Capacity 產能 (Meter /min)	Servo power/ Servo quantity 伺服馬力/數量	Heater 電熱	Power Required 全台需電容量	Air supply Required 空壓需求	Machine Size 機器尺寸 L x W x H (M)	Packing Size 裝箱尺寸 L x W x H (M)	N.W. / G.W. 淨重 / 毛重 (Kgs)
STR-680VC -RB3S	1 x 380~680 Roll max.110	450~2000 / 0.008~0.018	Max. 120M/ line/ minute	13.8KW/ 5+3 Servo	2.0 KW	15KW	0.6 Mpa 400ml / min	8.1 x 1.4 x 2.4	Sealing machine 3.15 x 1.5 x 2.3 / Rewind + Unwind 2.6 x 2.1 x 2.2	4000 / 4500
STR-850VC -RB3S	1 x 540~850 Roll max.110	450~2000 / 0.008~0.018	Max. 120M/ line/ minute	14.8KW/ 5+3 Servo	2.8 KW	17KW	0.6 Mpa 400ml / min	8.3 x 1.6 x 2.6	Sealing machine 3.35 x 1.7 x 2.3 / Rewind + Unwind 2.9 x 2.3 x 2.2	4700 / 5300
STR-1000VC -RB3S	1 x 680~1000 Roll max.110	450~2000 / 0.008~0.018	Max. 120M/ line/ minute	15.8KW/ 5+3 Servo	3.5 KW	19KW	0.6 Mpa 400ml / min	8.5 x 1.8 x 2.8	Sealing machine 3.55 x 1.9 x 2.3 / Rewind + Unwind 3.2 x 2.5 x 2.2	5500 / 6200
Option 選配	1. In-line mark sensor device ; 2. Customized Perforated pitch; 3. In-line Robot working station; 4. Automatic package machine; 5. PC Automatic thermal code system for auto package system.									